




The 'WHIRLWIND' Manual

LAY END-CUTTER

Model LCS(M)

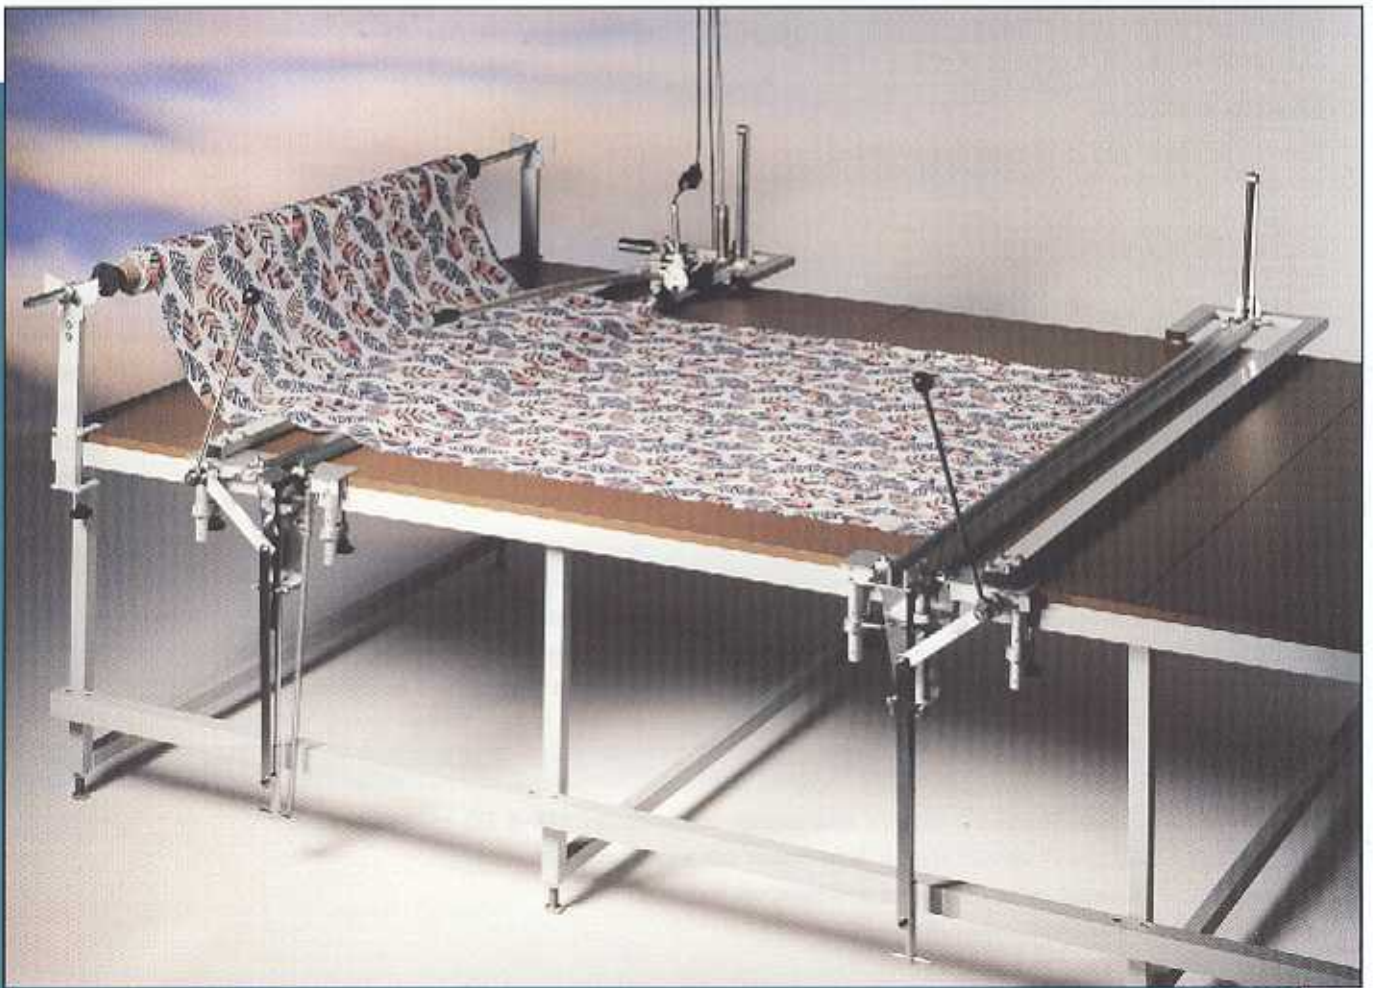

Effortless, fast and accurate cutting & clamping of cloth
Saves up to 5 cms (2") over-allowance of cloth at ends of lay

Used by:

Garment Makers

Bedding and Curtain Manufacturers

and many other industries everywhere!

Benefits:

Saves cloth every time you make a cut!

Increased efficiency – saves time!

Fitted in minutes – No drilling or
table alterations necessary

USER-FRIENDLY

Simple to install and use.
Easy reach cutter head handle
Lift handle fully adjustable for operator comfort.



ACCURATE

Nylon slides in extruded aluminium guide track ensure a perfectly straight cut every time.

FAST & EFFICIENT

Operator retains full control of cut through fabric.

Clamp section

Easily movable (by one person) when changing lay-length.

Specification

LCS "M"	LCS "M" 55	LCS "M" 60	LCS "M" 60
Maximum fabric width	168cm/66"	183cm/72"	198cm/78"
Minimum table width	183cm/72"	198cm/78"	213cm/84"
Maximum table top depth (at operators side)	125mm/4 ⁷ / ₈ "	125mm/4 ⁷ / ₈ "	125mm/4 ⁷ / ₈ "
Maximum Lay Height	30cm/12"	30cm/12"	30cm/12"

Operating Specification

- Manual pull/push handle – Press button in handle for cutter operation.
- Lifting mechanism – Mechanical with counter-spring for weight compensation.
- Automatic locking catch activates when lifter raised to maximum height.

Electrical Specification

220/240 volt AC/Single Phase/50 Hz/0.75 amp power consumption (UK & EC countries etc.).

100/115 volt AC/Single Phase/60 Hz/1.5 amp power consumption (USA etc.).

(Other suitable voltages or transformers available on request)

Cutter motor: 6500 rpm nominal speed
75 watts output

Shipping Information

	LCS "M" 55	LCS "M" 60	LCS "M" 65
Weight (nett/gross)	28/40 Kg	28.5/41 Kg	29/42 Kg
Packed size and cubic metres	220/43/25cm (0.24m ³)	235/43/25 (0.25.5m ³)	250/43/25 (0.27m ³)

CE Conformity

Model LCS(M) conforms to the related Safety, CE marking and EMC regulations and directives operative in the EC and UK.

Supplied by:

Miniroller
TEXTILE MACHINES

Tel: 00 44 (0)161 745 7456
Fax: 00 44 (0)161 745 7455
E-Mail: tm@miniroller.co.uk
www.miniroller.co.uk

Miniroller Textile Machines
7, Park House Bridge Estate
Langley Road
Salford M6 6JQ, England